



SmartTouch®  
STEUERUNG



Á ü 9  
A Á i  
Š í  
1  
ü Z Á  
A á 2 Ü  
Á Á Á  
[ Á  
Ü í  
Á Á S  
i c Z



Eingestellte  
Programme



QuickRelease®  
System



3200 W  
(nur GPX)



Vorheizen




Electromagnetisch


## OPTIONALÄI á 1 Ac " Ä




Arbeitstisch




DTG Platte




4er Set Ersatzplatten




Druckregler



teflonbeschichtete  
Dichtung



Nomex® Bezug



Schuh-Platte




Untere Heizplatte

## ÚA2c ÆÌ 2c A Š AÄ{ Š ° ~A

Electromagnetic	1
2	2
40x50 cm / 16x20 "	P
15 mm	Max l
58 Kg / 128 lb	[
330 g/cm <sup>2</sup>	9
220 °C / 429 °F	°C / °F Max
2500 W	~
3200 W (GPX)	
240 V Single-phase	
11 A	
14 A (GPX)	l
Z	
Åretreatment, l	
á	
Uextil l ublimation,	
l	
969x990x453 m	Š

## AiÆ ÚA~~áÆ AÆ

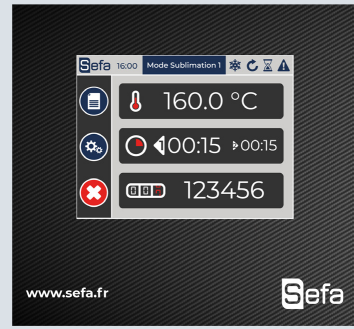

### Æ SmartTouch® l

Ä

l

l

ù


á

Š

A2> [ ÄAAÆŠ

ù


c




## OPTIONALAÌ á 1 Ac " Ä




TAB-98 LITE



PLA-DRY M




PLAÚÚAÆ-SET  
12 x 8 cm, 15 x 15 cm,  
12 x 45 cm, 25 x 30 cm.



PLA-SHOES-CV





ACC-CHAUD-INF



OPT-2POS-CLAMPRO

## Š ° A

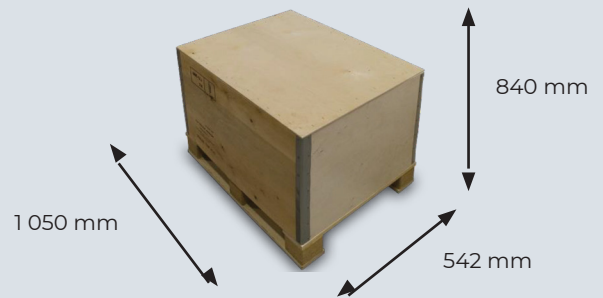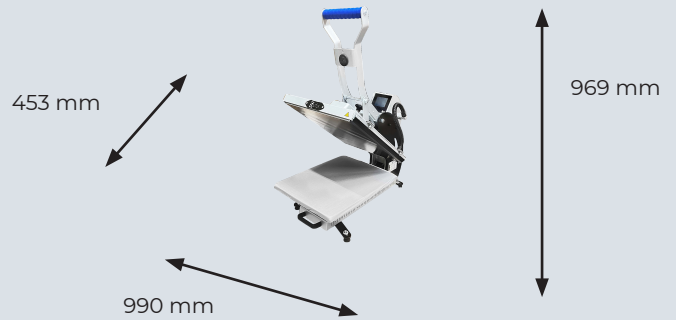

ù [ CAI-011 : 19 kg